



## Installation Guide

celexon screen  
Manual Expert

## Installation

Install the screen so that it is central for most viewers. When fully extended, please ensure that the lower third is about eye level. The screen can be wall or ceiling mounted (You may be required to purchase screws and wall plugs suitable for your specific building material, use  $\varnothing$  ca.5x35mm screws).

### Ceiling installation

Mark out two parallel lines with the appropriate hole spacing of the mounting brackets on the ceiling. Ensure that they are aligned and drill the holes. Screw the mounting brackets to the ceiling (see fig 1). Then hang the screen on the brackets (see fig 5) and tighten the safety screw underneath the screen (see fig 6).

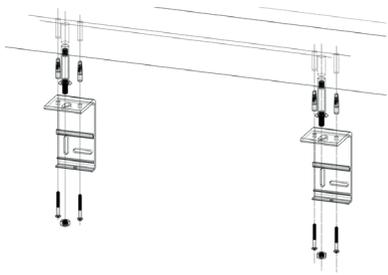


Fig 1: Mounting brackets attached to ceiling



Fig 2: Side view of ceiling installation

### Wall installation

Mark out two parallel lines with the appropriate hole spacing of the mounting brackets on the wall. Ensure that they are aligned and drill the holes. Screw the mounting brackets to the wall (fig 3). Next, hang the screen on the brackets (see fig 5) and tighten the safety screw underneath the screen (see fig 6).

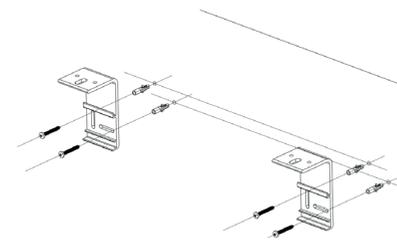


Fig 3: Mounting brackets attached to wall

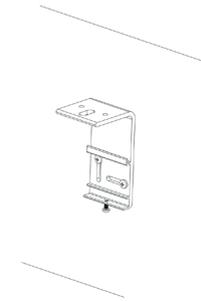


Fig 4: Mounting bracket

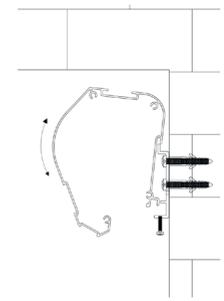


Fig 5: Side view of screen attaching to mounting bracket

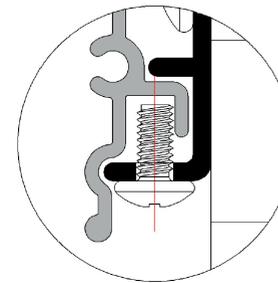


Fig 6: Safety screw

## Operating instructions

### To lower the screen:

Pull the fabric down to the desired position using the handle on the weighted bar (fig 1). Wait for about 3 seconds and slowly release the handle until the screen has stopped. The screen can be stopped approx. every 10cm.

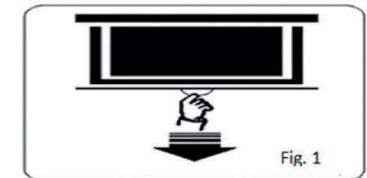


Fig. 1

### To retract the screen:

Pull the fabric down, approx. 3-5cm to disengage the locking mechanism (fig 2) and pause for a second. Once the locking mechanism has been disengaged, the screen will pull back automatically into its housing (slow-return-mechanism).

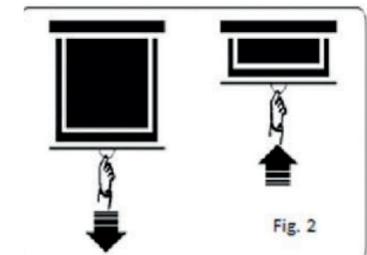


Fig. 2